ASTHOR GOTHIC

	OVAL190			
	Bays of 8 m		Bays of 9,6 m	
	Double	Simgle	Double	Simgle
Vent of 2 m				

	OVAL240			
	Bays of 12,80 m		Bays of 16 m	
	Double	Simgle	Double	Simgle
Vent of 2 m				
Vent of 3 m				

» **Structure:**

- Designed according to European standards
- Structure made of hot-dip galvanized steel (discontinuous process and Sendzimir). Option for galvanization and lacquer for better durability in harsh conditions.
- Internal reinforcements, according to the type of crop and climatic zone.
- Highly resistant and wide gutters that ease the assembly and allow the drainage of large amounts of water. Designed to collect condensation water sliding down the plastic.
- Arches made of Oval190 mm and Oval240 tubing.
- Distance between pillars: 2 m / 2.5 m / 3 m / 4 m / 5 m.
- Distance between arches: 2 m / 2.5 m / 3 m / 4 m.

*Possibility of other sizes upon request

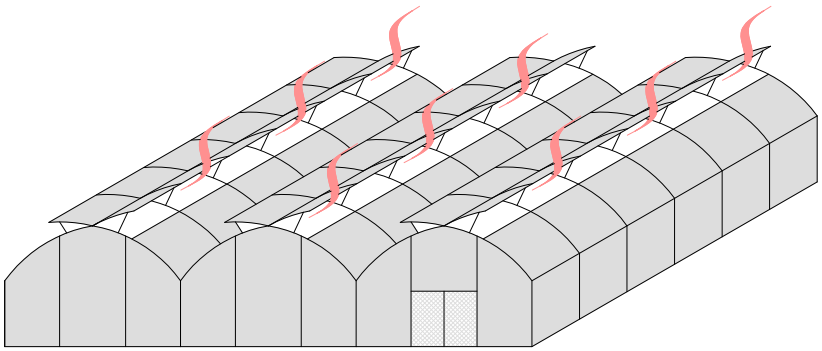

» **Ventilations:**

- Lateral and fronts
  - Roll-up
  - Guillotine.

  Optional: vents can be fitted with anti-trip or anti-insect netting
- Top vents:
  - Single of 37.5% - 31% - 23.5%
  - Double of 50% - 41.5% - 31%

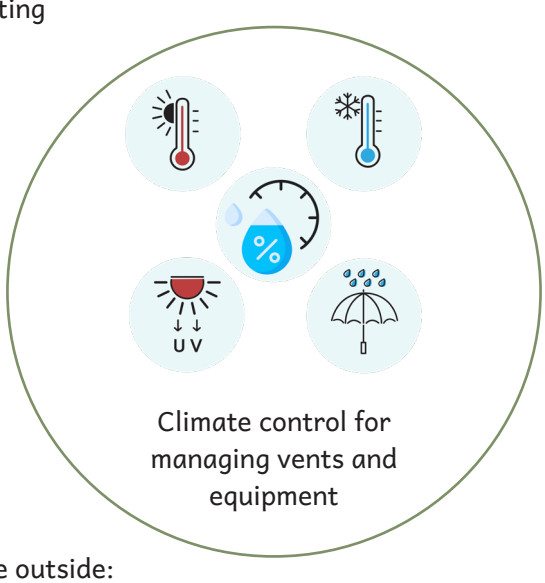

Climate control for managing vents and equipment

» **Covering:**

- Single polyethylene
- Double polyethylene with air inflation system
- Polycarbonate

» **Doors:**

To enhance greenhouse efficiency and provide better insulation from the outside:

- Sliding, roll-up, lift-up, security...
- Antechambers

Consult our sales department for other available options for your operational and security needs.

» **Dimensions:**

OVAL190

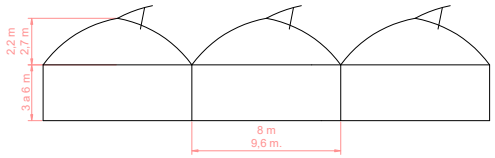

	WIDTH	HEIGHT TO THE GUTTER	HEIGHT TO THE TOP
GOTHIC 800	8 m	3 a 6 m	2,2 m
GOTHIC 960	9,6 m	3 a 6 m	2,7 m

OVAL240

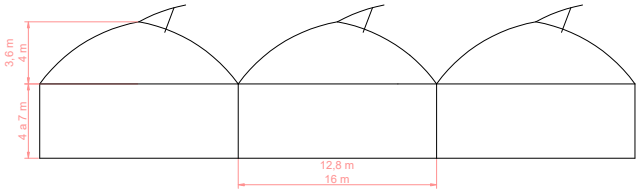

	WIDTH	HEIGHT TO THE GUTTER	HEIGHT TO THE TOP
GOTHIC 1280	12,8 m	4 a 7 m	3,6 m
GOTHIC 1600	16 m	4 a 7 m	4 m