


	WIDTH	HEIGHT TO THE GUTTER	HEIGHT TO THE TOP	DISTANCE BETWEEN PILLARS	DISTANCE BETWEEN ARCHES
MULTIASTHOR 640	6,4 m	2,5 a 4,5 m	1,2 m	2,5 / 5 m	2,5 m
MULTIASTHOR 800	8 m	2,5 a 4,5 m	1,6 m	2,5 / 5 m	2,5 m
MULTIASTHOR 960	9,6 m	2,5 a 4,5 m	1,8 m	2,5 / 5 m	2,5 m

» **Structure:**

- Designed according to European standards
- Structure made of hot-dip galvanized steel (discontinuous process and Sendzimir). Option for galvanization and lacquer for better durability in harsh conditions.
- Highly resistant and wide gutters that ease the assembly and allow the drainage of large amounts of water. Designed to collect condensation water sliding down the plastic.
- Arches in Oval tube 190 mm



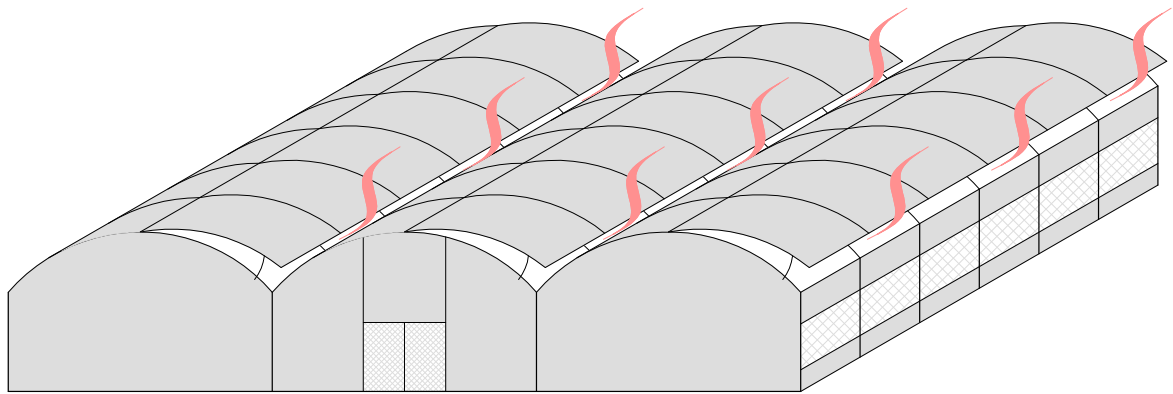

» **Ventilations:**

- Top ventilation with  $\frac{1}{2}$  arch or  $\frac{1}{4}$  of arch openings
- Lateral roll-up or guillotine ventilations
- Optional: ventilations can be provided with anti-trip or anti-insect's net

